



XLS Solar Laminate Series

Models: XLS11-72 XLS22-144


Basic Characteristics at STC		XLS11-72	XLS22-144
Power ($\pm 10\%$)	Pm (W)	72	144
Open Circuit Voltage	Voc (V)	24.2	48.4
Short Circuit Current	Isc (A)	5.1	5.1
Voltage at Max Power	Vm (V)	17.60	35.20
Current at Max Power	Im (A)	4.09	4.09
Length (± 5 mm/0.20 in)	L (mm/in)	2741/107.9	5392/212.3
Width (± 3 mm/0.12 in)	W (mm/in)	378/14.9	378/14.9
Weight	M (kg/lbs)	2.8/6.2	5.3/11.7
Thickness	T (mm/in)	1.5/0.06	1.5/0.06

Characteristics for System Design *	
Max System Voltage	600 V
Series Fuse	8 A
Temp Coefficient of Power	- 0.23 %/°C
Temp Coefficient of Voc	- 0.38 %/°C
Temp Coefficient of Isc	+0.12 %/°C
NOCT	51.5 °C
UL 1703 Fire Rating	Class A*
Connectors	12 AWG double-insulated PV cable. Tyco Solarlok connectors 4-1394462-8 (+) and 7-1394461-3 (-). MC4-compatibles upon request.

Certifications	
Certified to the following standards: UL 1703.	

Warranty	
25 year limited power output warranty (80% of minimum power at 25 years)	
5 year limited product warrant	

All specifications subject to change without notice.

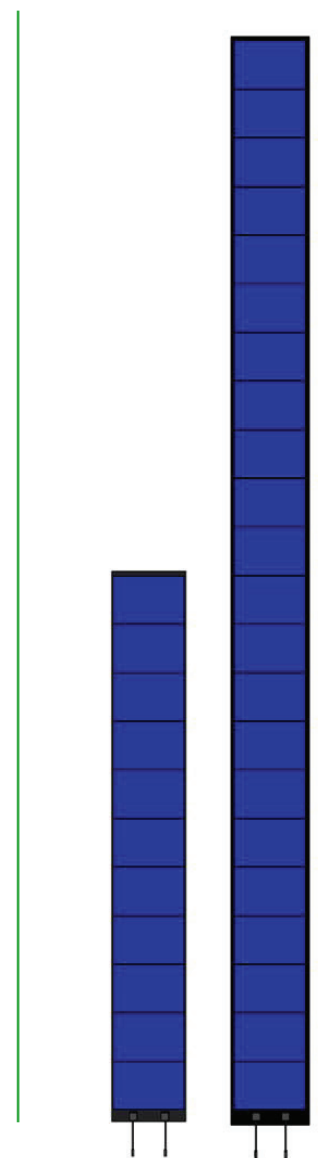

Manufactured by Xunlight Corporation

Qualifications and Certificates



Star8 Australia Pty Ltd

Suite 3, 1027 Manly Road, Tingalpa, QLD 4173

Mobile+ 61 416 029160 (GMT + 9) Email info@star8australia.com.au Website www.star8australia.com.au